



ISSN: 2321-2152



**IJMECE**

*International Journal of modern  
electronics and communication engineering*

E-Mail

[editor.ijmece@gmail.com](mailto:editor.ijmece@gmail.com)

[editor@ijmece.com](mailto:editor@ijmece.com)

[www.ijmece.com](http://www.ijmece.com)

# Colour Edge Detection Using Intensity and Chromatic Differences in Combination

<sup>1</sup>CHEEKATYALA ANJAN KUMAR, <sup>2</sup>THOTA  
SRAVANTI<sup>3</sup>NENAVATH DASHARATH,  
<sup>4</sup>POLU BALKUMAR REDDY

---

*Abstract: The term "edge detection" refers to a collection of mathematical techniques for categorising spots in an image when the picture intensity changes abruptly or contains discontinuities. The work attempts to discover a method for identifying colour edges using the colour and intensity information of two new pictures, H-image and T-image, created through colour space transformation, which result in two derivatives of H-image and T-image that are then merged to achieve the final edge.*

---

*Keywords: Digital Image, Colour Edge Detection*

---

## I. INTRODUCTION

There are three basic types of edge detection: one-to-one, neighbourhood, and many-to-one procedures, all of which use the pixel values to change the individual pixels in a picture. If the pixels in the input picture have the same values, a one-to-one procedure may be used to compare the images. A cluster of surrounding pixels around a pixel in the input picture is used to create a new image by use of the Neighborhood procedures.

For colour edge detection, low-level procedures including sharpening, filtering, smoothing, edge detection, and noise reduction are critical. Several image processing applications such as image analysis, segmentation, and identification rely heavily on colour edge detection, and it's time to focus more

technique for colour edge identification that makes use of inter-component difference information.

S-images are defined as the significant differences between everything about the two-shading modules in every multi-otherwise worldly picture F, and elective dim E-images are then produced by weighing S-images and dim power images H. Images of R and G are combined to eliminate the final

on processing coloured pictures.

Compared to colour less photos, multi-spectral images include a massive and comprehensive quantity of edge information. The edges frequently resemble the boundaries of an item, and the physical attributes, such as reflectance or light, also vary. Consequently, there will be no discernible border, which is why it is not suitable for certain image processing applications.

Object borders are defined by colour, according to psychological studies of the human visual system, It's important to figure out a way to identify colour edges using two fresh input photos that have been merged using colour and intensity information. In this article, we provide a

remaining edges. Additional relationships are discovered by doing quantitative evaluations under various levels of Gaussian turmoil. In terms of adequacy and power, the results of several tests show that our approach outperforms more traditional shading spaces like RGB, YCbCr, and HSV.

---

,M.Tech Assistant Professor , [anjankumarcheekatla@gmail.com](mailto:anjankumarcheekatla@gmail.com)

M.Tech Associate Professor, [sravanti815@gmail.com](mailto:sravanti815@gmail.com)


,M.Tech Associate Professor , [ndasharath86@gmail.com](mailto:ndasharath86@gmail.com)

,M.Tech Assistant Professor, [balureddy5586@gmail.com](mailto:balureddy5586@gmail.com)

Department:ECE

Nagole Univerisity Engineering and Technology Hyderabad

---

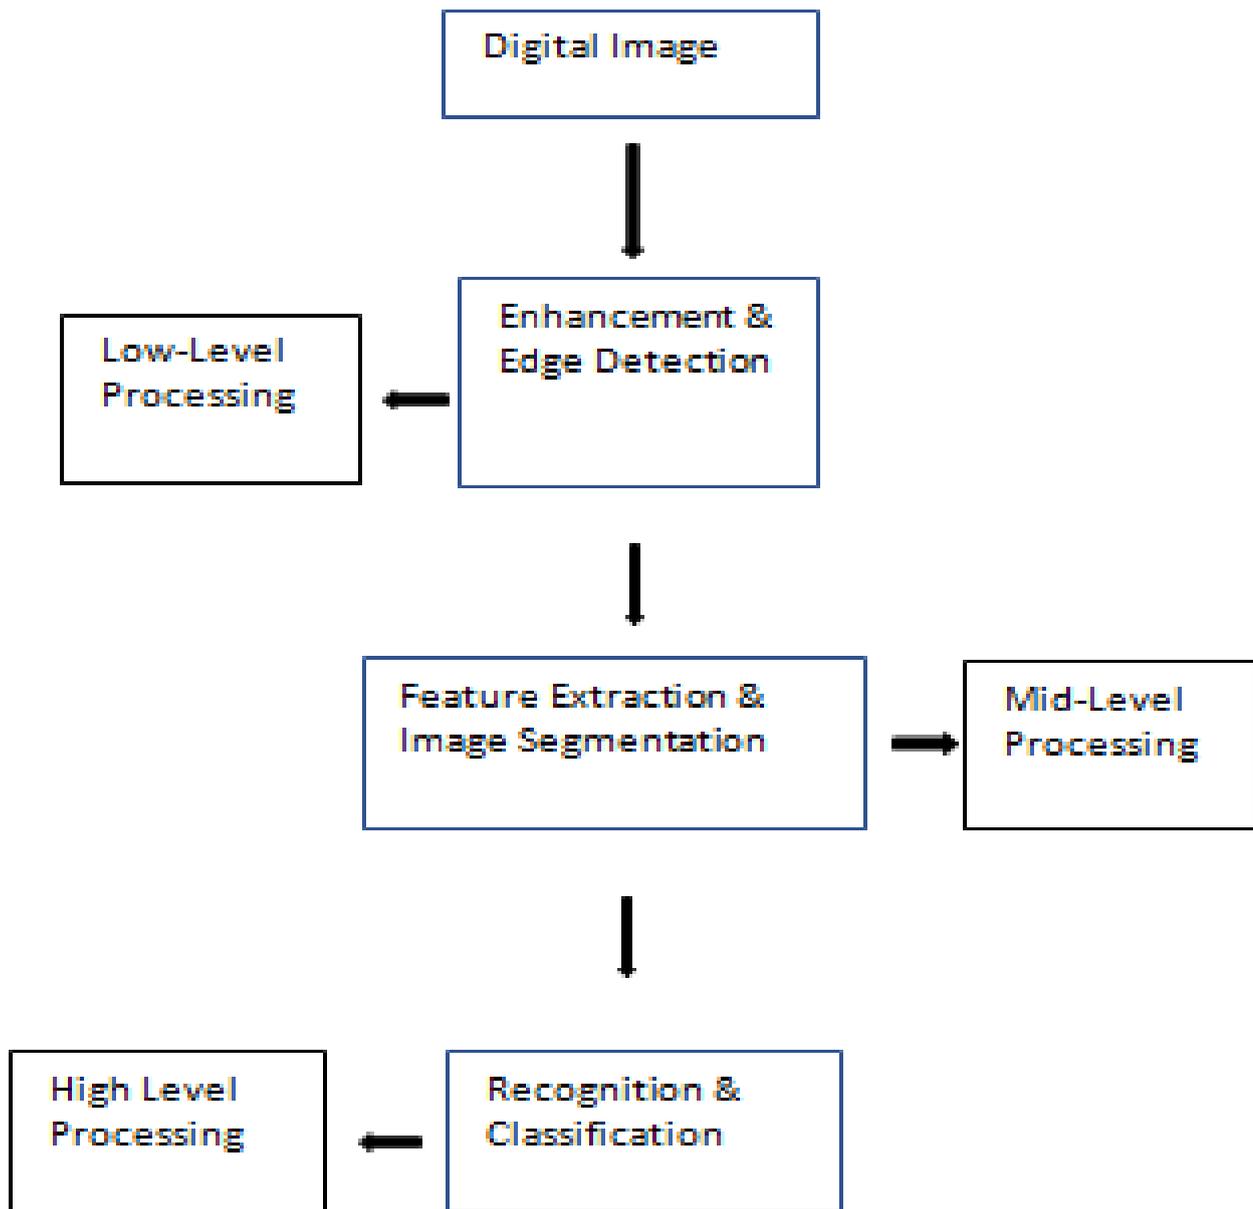



## Fig. 1: Flowchart of Digital Image Processing

Main phases in digital image processing are shown in Fig. 1. To put it another way, image processing at the basic levels includes:

1. There is no semantic exploration of image data, which means that they are not understood.
  2. 2D Fourier transforms and other signal processing techniques are included here.
  3. The use of the same approaches across a broad range of issues;
- There will always be issues with detecting edges in colour pictures, and the best approach to combine chromatic components and light intensity need to be determined.

## II. LITERATURE REVIEW

Physical edge detection is a suitable and simple low-level

dim is different to one mapping, which means that edge pixels with clear shading contrast but less force diversity are missing.

Edge detectors may be applied to all coloured components, however, the final edge will be a pattern of edges from separate component pictures. The generated edges may have more accuracy and comprehensive information than the edges from H-image, but the accuracy will not persist and may have missing edges since the inter-component information is neglected in the process of edge identification.

Some models, such as HLS HSV YUV, XYZ, and YCbCr [3, 4, 5], have been tested to ensure realistic and exact edge appearances. Converting coloured pictures to a specific colour space requires the extraction of edges from the pattern of the new space. It's because of this that the final edges are a blend of edge information, colour, and brightness information. [1] While some techniques have been proposed to find shading edges, such as morphological angle followed by exception dismissal [6,7], factual investigation of R-G and B-Y shading segments [7,8] and a self-organizing map (SOM), a dim scale edge indicator [9], and neighbourhood hypergraph and approval of a hyperedge.

There are more accurate and detailed data in the connected edges, but they are not precise enough for effective article detection and image division at this time despite having more data. Selecting another suitable shade area in this manner is still an important activity, and it depends on the administrators' or handling's current position.

## III. METHODOLOGY AND RESULT

When used in low-level vision applications, edge discovery may provide essential visual data for tasks such as feature extraction, division, and scene comprehension [2]. Most algorithms extract colour edges by either ignoring inter-component information in the pictures or by merging the edges disclosed by each of the colour components together.

application for providing essential visual data to highlight extraction, division, and scene comprehension [2].

Image difference and gradient detection for edge pixel judgement, preprocessing or smoothing, and continuous edge extraction are the three essential processes of edge detection. For edge detection, convolution templates are the first known gradient-based approaches, but it was Canny who developed the first edge detector with excellent performance, accuracy, and a single answer [2].

Conventional edge recognition methods, including convolution layouts and the Canny edge locator, are often defined by dark images, however, human shading discernments show that edge identification from shaded images requires a few upgrades or novel procedures. Transforming its luminance force picture G, from which it may then extract shading edges using standard edge IDs, can be seen as a simple solution to this problem. Edges in G-images are less precise because the transition from shading to Color edge identification is enhanced in this study by including inter-component difference information in the process.

### A. Colour Space Transform

Colour, rather than texture or form, is the most important visual cue for humans [7]. Even though several colour transformations and colour space models have been created, mapping from and to RGB space may be used to convert them.

There are several ways you can convert between RGB and YUV.

$$y = \omega_r r + \omega_g g + \omega_b b \quad (1)$$

$$u = b - y, v = r - y \quad (2)$$

There is a linear transformation from RGB to YUV colour space in equations (1) and (2). Weight are used to determine light intensity in YUV space. R, G and B values using weights  $\omega_r$ ,  $\omega_g$ ,  $\omega_b$ , where these weights are positive or less than and equal to 1.

The RGB to HSV transform can be defined as

$$[4]: V = \max(R, G, B)$$

$$P = V$$

$$/V$$

$$V = V -$$

$$M$$

$$M = \min(R, G, B)$$

YIQ and YCbCr transformations are identical to YUV, but HSV and HLS spaces have more sophisticated transform formulae [8]. [7, 9]. Let L be the original three-component multi-spectral picture, which expresses one component S-image as follows:

$$S(i, j) = \omega_1 |m(i, j) - n(i, j)| + \omega_2 |m(i, j) - p(i, j)| + \omega_3 |p(i, j) - n(i, j)| \quad (3)$$

To provide an overall picture of colour changes across

various components, we used S-images.

Because it is hard to differentiate between S-image and image G's luminance intensity and its grey values in image L, extra image T is acquired by weighting S-image and luminance intensity of image G as follows:

$$T(i, j) = k \cdot \frac{\omega_d H(i, j) + \omega_g S(i, j)}{\omega_d + \omega_g} \quad (4)$$


where  $\omega_d$  and  $\omega_g$  are the weights and determined in (5) and (6)

$$\omega_d = 1.5 \times \text{Range}(S) + \sigma(S) \quad (5)$$

$$\omega_g = 1.5 \times \text{Range}(H) + \sigma(H) \quad (6)$$

The range function was used to establish an image's valid intensity range by comparing the image's highest and lowest intensity values and using it as the standard deviation.


According to a majority of the time, (4) is used to increase the similarity between weighted qualities and weighted qualities ( $gS(i, j)$ ). Additionally, a maximum of 1.5 is observed since it aids in the production of certain amazing results rather than diverse features.

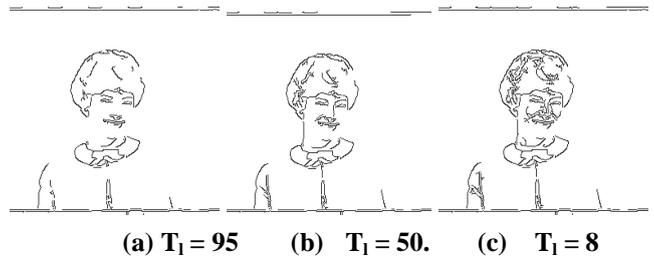

**Fig. 3: Extracted Edges with  $T_h = 220$  and  $T_l$  changes from 95, 50 to 8, Respectively**

In our method  $T_h$  and  $T_l$  are automatically determined as follows:

**Fig. 2: Orig. color Image (left) and Its Conforming 3 Sole Channel Images Comprising S-image, H-image and**

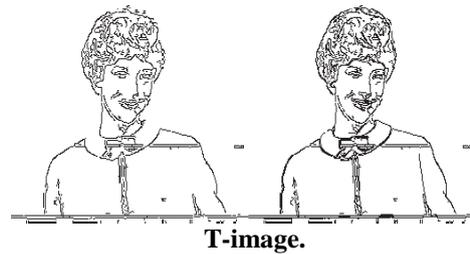

**T-image.**  
Fig 4 illustrates the S-image, the H-image and the T-image of a particular colour picture for comparison purposes.

Techniques to Image Processing at the Lowest Level Standard edge detectors have been utilised for assessment and consistent measurement to evaluate and detect better colour edges utilising the fusion scheme as the fundamental scheme. For our purpose, we're using well-known canny operators because of their reasonably good performance.

Formula (7) must be maximised by the matching filters  $f(x)$  and the intervals  $[-w, w]$  impulses and band-width of the canny operator:

$$\Sigma = \frac{\int_{-w}^w |f(x)| dx}{\sqrt{\int_{-w}^w f^2(x) dx}} \cdot \frac{|f'(x)|}{\sqrt{\int_{-w}^w f^2(x) dx}} \quad (7)$$

In accordance with canny's idea [2], Eq. has two components. The signal-to-noise ratio and second-order localization accuracy of the Canny detector have been obtained. The edge detector's tradeoff may be achieved by combining the two. Canny also established that the product of the two components in (7) would provide scale-invariant output, which was very significant in edge detection.. As all of the identified edges are local extrema, utilising a Canny operator ensures greater detection accuracy. Gauss function is used to identify probable edge pixels in the smoothed grey picture before normalising the gradient image. The Canny operator is used for edge detection in our research. Using  $T_h$  and  $T_l$  as key thresholds, we may get two quite distinct edge outcomes. This is seen in Fig 3 for the H-image when various thresholds are used for detection. Fig. 3 shows that decreasing  $T_l$  for a given  $T_h$  may offer us sharper edges, but it can also introduce noise. In order to identify Canny operator edges, the selection of threshold

settings is critical.

$$T_h = \gamma + \max(\gamma/2, \sigma) \quad (8)$$

$$T_l = |\gamma - \sigma|/2 \quad (9)$$

where  $\gamma$  and  $\sigma$  are the mean and standard deviation of any grey image in this process.

$T_l = 50$  may be determined for the H-image in Figure 3, and the conforming edges are shown in Figure 3(b), which is better than Figures 3(a) and 3(c). Figures 3 (c).

The following advancements have been used to distinguish the borders from the multi-phantom images:


The G-image and R-image are derived from the identical source picture; 2. Edges are identified from these two pictures using Canny administrators with the correspondingly determined parameters;

Following are the steps to resolve the image's edges to produce the shading picture Final:

$$F_{final} = E_R \quad E_G \quad (10)$$

**Fig. 4**  $E_R$  (Left) and  $E_{final}$  (Right) of color Image in Fig 2

$E_R$  and  $E_{final}$  in Fig. 4 have been detected for the color image in Fig. 2 and  $E_G$  in Fig. 3

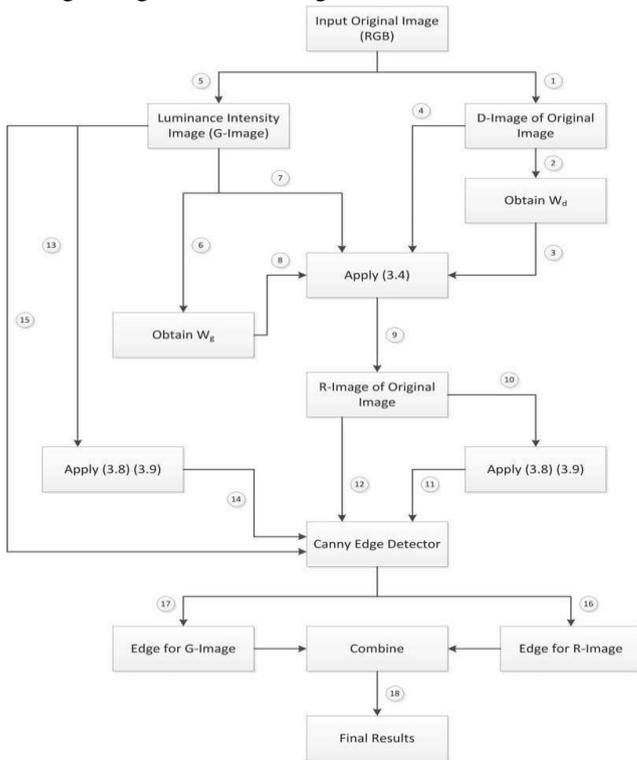

**Fig. 5.** Flowchart for Colour Edge Detection

#### IV. CONCLUSION

For colour edge identification, inter-component information given on colour pictures is vital and very precise, however, these inter-component characteristics have been overlooked in many current techniques. Colour edges can be improved if the intensity and chromatic variations addressed in this

article are fused, according to this study. It was confirmed that our suggested method was both effective and resilient by Gaussian noise tests on testing photos.

#### REFERENCES

1. Geusebroek, J.M., van den Boomgaard, R., Smeulders, Arnold W.M., & Geerts, H. 2001. Color invariance. IEEE Transactions on Pattern Analysis and Machine Intelligence, 23, 1338-1350
2. Canny, J. F. 1983. A computational approach to edge detection. IEEE Transactions on Pattern Analysis and machine intelligence, 8, (6): 679-698
3. Fotinos, A., Economou, G., and Fotopoulos, S. 1999. Use of relative entropy in color edge detection. Electronics Letters, 35, (18): 1532-1534
4. Palus, H. 1998. Representation of color images in different color spaces. In: Sangwine S. J., Horne R. E. N. (eds.), The color Image Processing Handbook, 67-90
5. Zhu, S. Y., Platinoids, K. N., and Venetsanopoulos, A. N. 1999. Comprehensive analysis of edge detection in color image processing. J. Optical Engineering, 38, (4): 612-625
6. Evans, A. N. and Liu, X. U. 2006. A morphological gradient approach to colour edge detection. IEEE Transaction on Image Processing, 15, (6): 1454-1463
7. Zhou, C. and Mel, B. W. 2008. Cue combination and colour edge detection in natural scenes. Journal of Vision, 8, (4): 1-25
8. Theoharatos, C., Economou, G. and Fotopoulos, S. 2005. Colour edge detection using the minimal spanning tree. Pattern Recognition, 38, (4): 603-606
9. Toivanen, P. J., Ansamaki, J., Parkkinen, J.P.S., and Mielikainen, J. 2003. Edge detection in multispectral images using the self-organizing maps. Pattern Recognition Letters, 24(16): 2987-2994